

Flexible Button Profile Set Up

Flexible Button Profile

Create a Flexible Button Profile specific to a phone model and apply it to any or all users, or create one for departments or grouped users

Creating a Flexible Button Profile

Click on Company, then Flexible Button Profile. Next click Add

The screenshot displays the iPECS insights web interface. On the left is a navigation menu with the following items: Company (circled in red), Company Details, Line Settings, Time Schedule, Call Barring, Site Management, LCM Management, eMG Series, Extension G/W Management, Trunk G/W Management, System Tone & Timer, Phone LED Control, Voicemail Service, Company Directory, Dial by Name Prompt, Feature Codes, Flexible Button Profile (circled in red), and Common Configuration. The main content area has a blue header 'My Home' and a sub-header 'Flexible Button Profile'. Below this are two tabs: 'Profile' and 'Button Setting'. A table with columns 'Profile Name', 'Device Type', and 'Description' is shown, containing one empty row. The table includes a search icon, pagination controls ('Page 1 of 1'), and a dropdown menu set to '10'. The text 'No records to view' is present. At the bottom right of the table are three buttons: 'Add' (circled in red), 'Modify', and 'Delete'.

Give the Profile a name, select LIP for any Vertical branded IP phone. Description is not needed, but can help you identify what type of user the Profile will be used for. Save and confirm the Profile settings.

Flexible Button Profile

Profile Button Setting

Profile Name	Device Type	Description
<input type="checkbox"/>	Page 1 of 1	No records to view

Add Modify Delete

Profile Name * 1040i

Device Type * LIP

Description 1040i - Cust Svc

Save Cancel

Next click Button Setting, then click the drop down for Profile and select the Profile to create/adjust

Flexible Button Profile

Profile **Button Setting**

Button 1 on the phone does not apply to the profile.
Multi client does not apply to buttons 1 and 2.

Profile : --- NONE ---

Digit Button Label

1040i (LIP)

Modify All Save Cancel Modify Delete

Scroll down and click modify all, to allow changes to any key



Select Digit as the Button Class for extensions, speed dial numbers or feature codes (**Note even though it appears that button 1 is programmable it is NOT. That is the DN key no other features can be assigned to it.**) Speed Dial will automatically populate, the Dial Digit column should be the number you want to dial, or feature you want to access when pressing that key. The Button Label will be what appears on the button on the phone display. Scroll down to the bottom of the screen and click save and confirm to save button definitions.

Profile **Button Setting**

i Button 1 on the phone does not apply to the profile.
Multi client does not apply to buttons 1 and 2.


Profile : 1040i (LIP)

<input type="checkbox"/>	Button Class	Button Type	Dial Digit	Button Label
1	<input type="checkbox"/> --- NONE ---			
2	<input type="checkbox"/> Digit	SPEED DIAL	101	Bob
3	<input type="checkbox"/> Digit	SPEED DIAL	102	Janet
4	<input type="checkbox"/> Digit	SPEED DIAL	98185551212	LA Office
5	<input type="checkbox"/> Digit	SPEED DIAL	538	Night Mode
6	<input checked="" type="checkbox"/> Digit	SPEED DIAL	543	Trans to VM
7	<input type="checkbox"/> --- NONE ---			
8	<input type="checkbox"/> --- NONE ---			

If modifying an existing Flexible Button Profile:

Check the Apply button profile subscribers automatically if the button is blank

Check the Overwrite items set by the subscriber if the user has programmed something on the button you wish to assign.

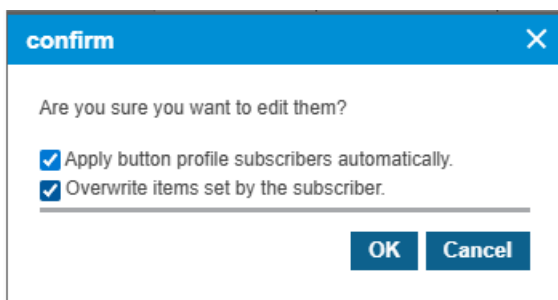

If you are creating a NEW Flexible Button Profile, the profile will need to be assigned to the users.

Go to User, then user Phone Configuration, key in the extension number to modify, hit enter or Quick Search. Next click on the drop down for Button Profile and chose the profile to select for this user, save and move on to the next user.

The screenshot displays the 'User Phone Configuration' page. On the left is a navigation menu with 'User' and 'User Phone Configuration' circled. The main area shows a phone image and a configuration form with fields for Extension (105), Site Name, User Name, Device, MAC Address, Button Count, DSS Slots, and Applied Profile. A 'Quick Search' button is circled next to the extension field. Below the form are 'Phone Restart' and 'User Search' buttons. At the bottom, a table lists button profiles with a dropdown menu open, showing options like 'ACD (LIP)', 'Basic (LIP)', and 'Test Button Profile (LIP)'. A red arrow points to the 'ACD (LIP)' option.

Button Profile	Phone No.	Dial Digit	Button Label	Digit Number Setting
1 <input type="checkbox"/> DN N	1040i (LIP)	105		
2 <input type="checkbox"/> Digit	ACD (LIP)	544	Force HF	
3 <input type="checkbox"/> Digit	Basic (LIP)	545	Force Ring	
4 <input type="checkbox"/> Digit	Test Button Profile (LIP)	9217553305	Andy Mobile	