


Ethernet: CAT5 SH  
 24VAC Power: 18/2 SH  
 Dry Contact/Relay: 22/4 SH

For RS232 use:  
 RS422TX+ >> RS232 TX  
 RS422RX+ >> RS232 RX  
 DRYIN- >> RS232 Gnd

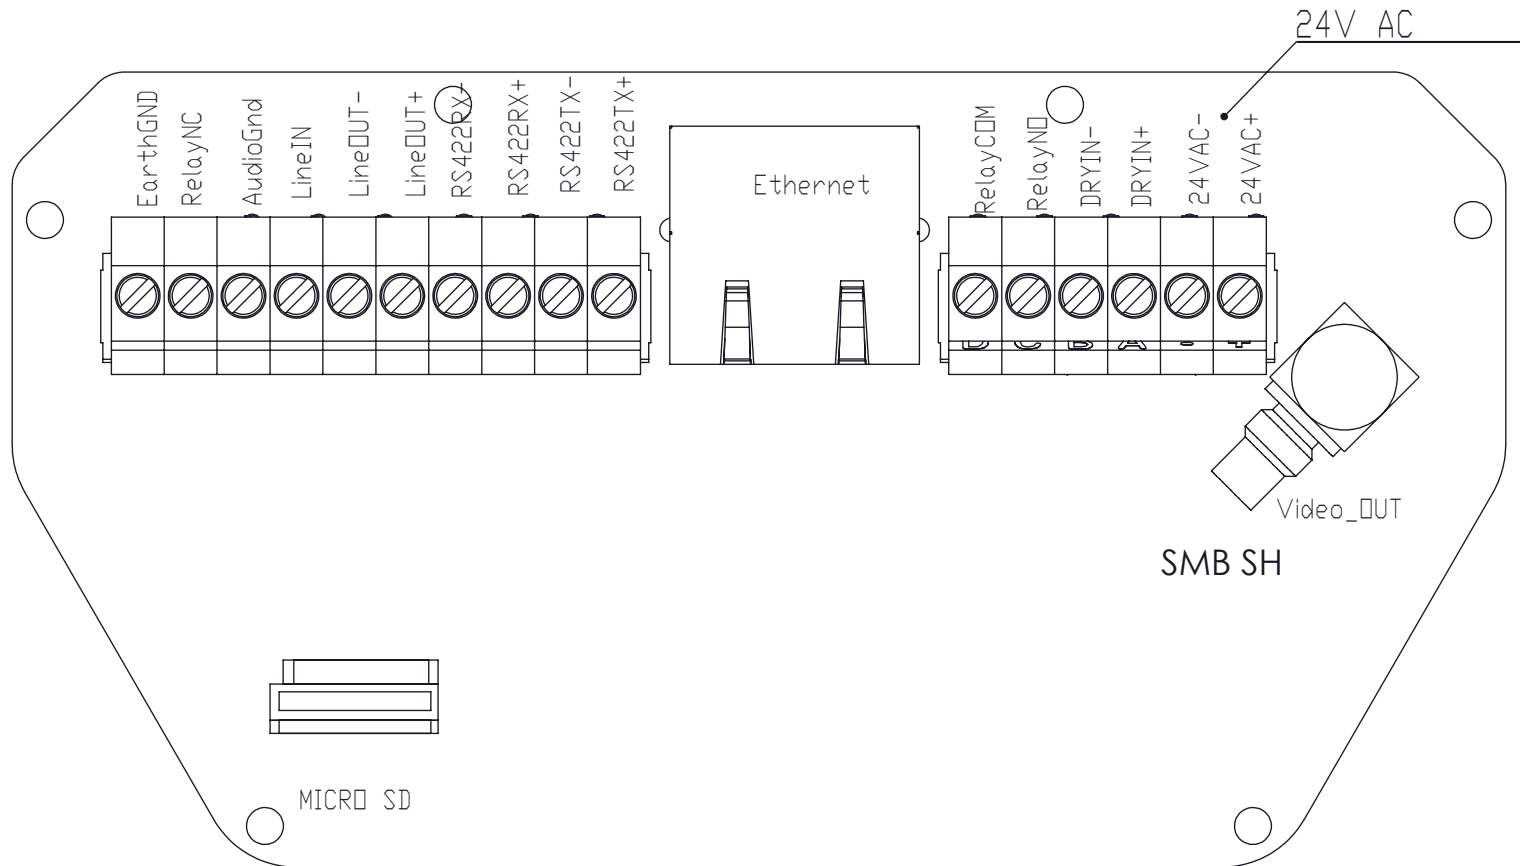

### SIGHTSENSOR FIELD WIRE TERMINATIONS

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF AND PROPRIETARY TO SIGHTLOGIX, INC., AND ARE NOT TO BE DISCLOSED, REPRODUCED, COPIED OR USED AS THE BASIS OF MANUFACTURE OR SALE OF APPARATUS AND /OR DEVICES OR OTHERWISE WITHOUT SIGHTLOGIX' PRIOR WRITTEN CONSENT.

SIGHTLOGIX, INC.		PRINCETON, NJ		DESIGNED BY /DATE:	SCALE: 2:1	SHEET 1 OF 1	
SIGHTLOGIX COMPONENT PARTS ARE ROHS COMPLIANT		TOLERANCES UNLESS SPECIFIED		DRAWN BY /DATE: S. VAN DER WAL 7 MAR 2024	TITLE: Gen4 Connection Chart		
ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED		0.0	±	.030			
THIRD ANGLE PROJECTION		0.00	±	.015	SIZE: A		DWG. NO.:
		0.000	±	.005	REV: A		
		ANGULAR ± 1/2°					

5

4

3

2

1